

Bodywork

38. Code for bodywork: DA 11

Coupling device

44. Approval number or approval mark of coupling device (if fitted): e1*94/20*0143*00

45.1. Characteristics values:

D: 170 kN

V: - kN

S: - kg

U: - m

Miscellaneous

50. Type-approved according to the design requirements for transporting dangerous goods: Non applicable

51. For special purpose vehicles: designation in accordance with Annex II Section 5: Non applicable

52. Remarks:



EC CONFORMITY CERTIFICATE
DIRECTIVE 2007/46
COMPLETE VEHICLE

EC CERTIFICATE OF CONFORMITY

The undersigned Tomás Hernández Fuentes, Technical director, hereby certifies that the vehicle:

0.1. Make (Trade name of manufacturer): **PARCISA**

0.2. Type: **CA-3E**

Variant (*): **11C1NN**

Version (*): **420B107F5**

0.2.1. Commercial name: **CA-3E**

0.4. Vehicle category: **O4**

0.5. Company name and address of manufacturer:

PARCISA, S.L.U.

Ctra. Tomelloso, Km. 1,8

02600-VILLARROBLEDO-ALBACETE-SPAIN

0.6. Location and method of attachment of the statutory plates:

Right side, over landing legs

Location of the vehicle identification number:

Right side, front first axle


0.9. Name and address of the manufacturer's representative (if any):

Non application

0.10. Vehicle identification number: **VS9A3CX30K1032233**

conforms in all respects to the type described in approval e9*2007/46*6290*02 issued on 29/11/2018 and can be permanently registered in Member States having hand traffic and using units for the speedometer.

Villarrobledo 12 de november 2019

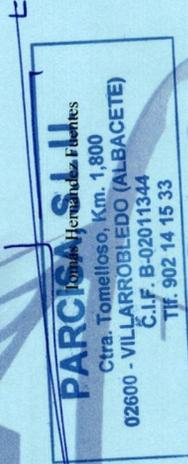

General construction characteristics

- Number of axles: 3 and wheels: 6
- Number and position of axles with twin wheels: None
- Steered axles (number, position): None

Main dimensions

- Wheelbase: mm
- 4.1. Axle spacing 1-2: 5250 mm 2-3: 1310 mm 3-4: 1310 mm
- Length: 11240 mm
- Width: 2550 mm
- Height: 3750 mm
- Distance between the centre of the coupling device and the rear end of the vehicle: 9680 mm
- Length of the loading area: 10080 mm
- Rear overhang: 1810 mm

Masses

- Mass in running order: 7350 kg
- 13.1. Distribution of this mass amongst the axles:
 - 1806 kg
 - 1806 kg
 - 1806 kg
 - kg

13.2. Actual mass of the vehicle: 7350 kg

16. Technically permissible maximum masses:

16.1. Technically permissible maximum laden mass: 42000 kg

16.2. Technically permissible mass on each axle:

- 9000 kg
- 9000 kg
- 9000 kg
- kg

16.3. Technically permissible mass on each axle group:

- 27000 kg
- kg
- kg
- kg

17. Intended registration/in service maximum permissible masses in traffic

17.1. Intended registration/in service maximum permissible laden mass: kg

17.2. Intended registration/in service maximum permissible laden mass on each axle:

17.3. Intended registration/in service maximum permissible laden mass on each axle group:

19. Technically permissible maximum static mass on the coupling point of a semi-trailer or centre-axle trailer: 15000 kg

Maximum speed

29. Maximum speed: 100 km/h

Axles and suspension

- Position of lift axle(s): 1°
- Position of loadable axle(s): Non applicable
- Axle(s) fitted with air suspension or equivalent: yes
- Tyre/wheel combination: 385/65R22,5 / 22,5X11,75 (160 K)

Brakes

36. Trailer brake connections: pneumatic